


MicroIQ™ UT

CAM LOCK REPLACEMENT - 3 access codes

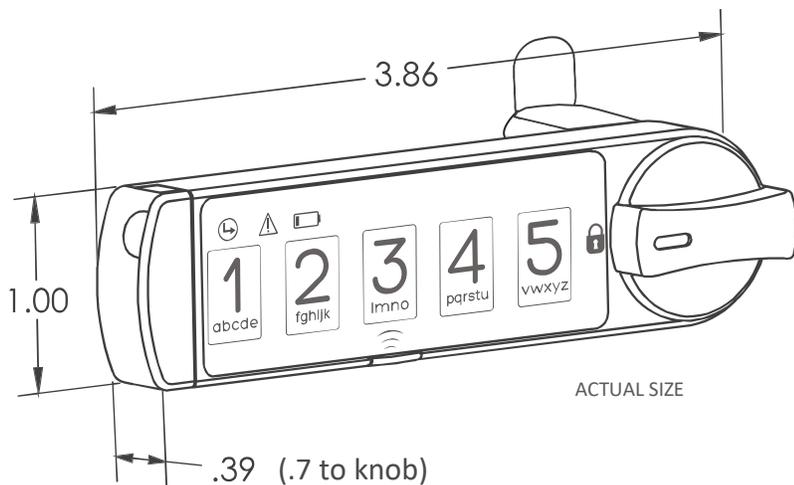

The smallest
footprint in
the industry

HIGHLIGHTS :

- Applications: storage cabinets, lockers, desks, furniture, offices, school, hospitals, health clubs, mail boxes, doors, drawers, tool cabinets, medical storage, file cabinets
- External dimensions: H 1.00" W 3.86" D 0.39"
- Finishes: satin chrome or black
- Fit: retrofits virtually any cam lock application with standard 3/4" DD hole with 3/8", 5/8", 7/8" and 1 1/8" sizes available
- Configurations: vertical up, vertical down, left and right hand models
- Levels of access: master, supervisor, user
- 6 digit master code, 3-6 digit supervisor, and 3-6 digit user code
- Control key: master key code or control key fob
- Wireless access options: infrared key fob
- Keypad access: easy to read 5 digit membrane keypad capable of 1-9 digit entries
- Operating modes: station mode (default) and locker mode


OPERATING FEATURES :

- Power: 20mm coin cell battery, replaced externally
- Battery life: 50,000 operations; 3-5 years
- LED indicators: green (proceed), red (error), yellow (low battery)
- Locking mechanism: motorized; immune to shock, vibration and magnetic field
- Latching mechanism: supplied with straight cam, offset cam or use existing
- Locking positions: one or two
- Knob rotation: clockwise or counterclockwise; 90 or 180 degrees
- Operating temperature: 0 to 50C
- Storage temperature: -10 to 70C
- Operating moisture: 20% - 80% Rh
- Cleaning: withstands bleach and chemical cleaners




701 Gullo Ave
Elk Grove Village, IL 60007
www.microiqlock.com


Mounting details:

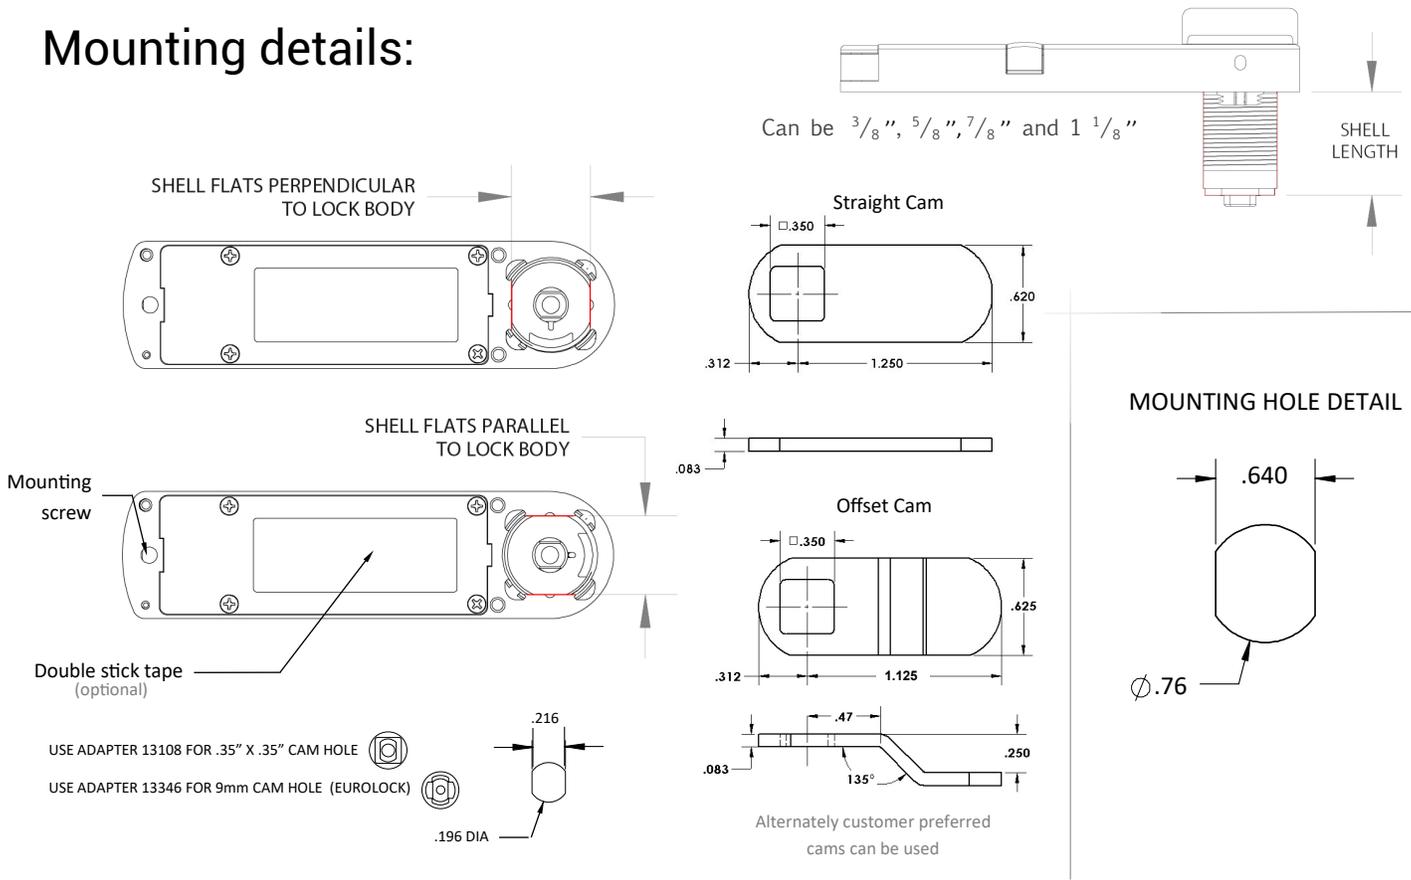

Orientation options:

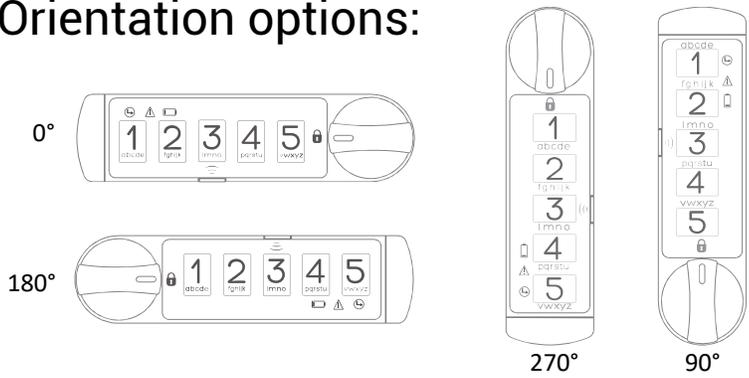

Knob options:

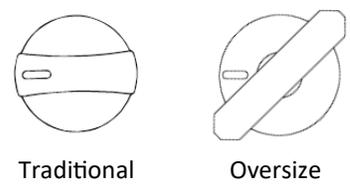

Key-fobs:



The **MicroIQ** can pair one control key fob and two user key fobs simultaneously.

Multiple key fobs of the same code can be used to access the lock.