


MicroIQ™ UM

CAM LOCK REPLACEMENT - 25 access codes

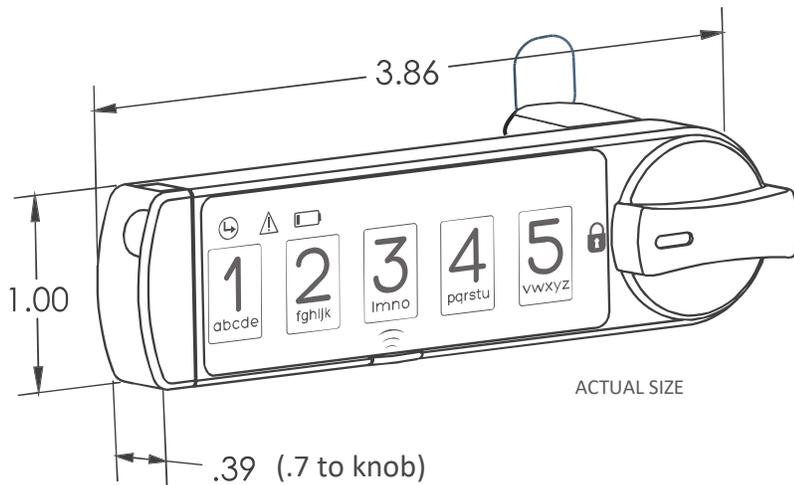

The smallest
footprint in
the industry

HIGHLIGHTS :

- External dimensions: H 1.00" W 3.86" D 0.39"
- Finishes: satin chrome or black
- Fit: retrofits virtually any cam lock application with standard $\frac{3}{4}$ " DD hole with $\frac{3}{8}$ ", $\frac{5}{8}$ ", $\frac{7}{8}$ " and 1 $\frac{1}{8}$ " sizes available
- Configurations: vertical up, vertical down, left and right hand models
- Levels of access: - 1 master code (5 digits)
- 25 users codes (5 digits)
- Control key: master key code or control key fob
- Wireless access options: infrared key fob
- Applications: storage cabinets, lockers, desks, furniture, offices, school, hospitals, health clubs, mail boxes, doors, drawers, tool cabinets, medical storage, file cabinets
- Keypad access: easy to read 5 digit membrane keypad capable of 1-9 digit entries

OPERATING FEATURES :


- Operating modes: station mode
- Power: 20mm coin cell battery, replaced externally
- Battery life: 3 to 5 years typical or 50,000 operations*
- LED indicators: green (proceed), red (error), yellow (low battery)
- Locking mechanism: motorized; immune to shock, vibration and magnetic field
- Latching mechanism: supplied with straight, offset cam or use existing
- Locking positions: one or two
- Knob rotation: clockwise or counterclockwise; 90 or 180 degrees
- Operating temperature: 0 to 50C
- Storage temperature: -10 to 70C
- Operating moisture: 20% - 80% Rh
- Cleaning: withstands bleach and chemical cleaners

*calculated based on normal average usage




701 Gullo Ave
Elk Grove Village, IL 60007
Ph: (847) 640-7002
Fax: (847) 640-7008
www.microiqlock.com


Mounting details:

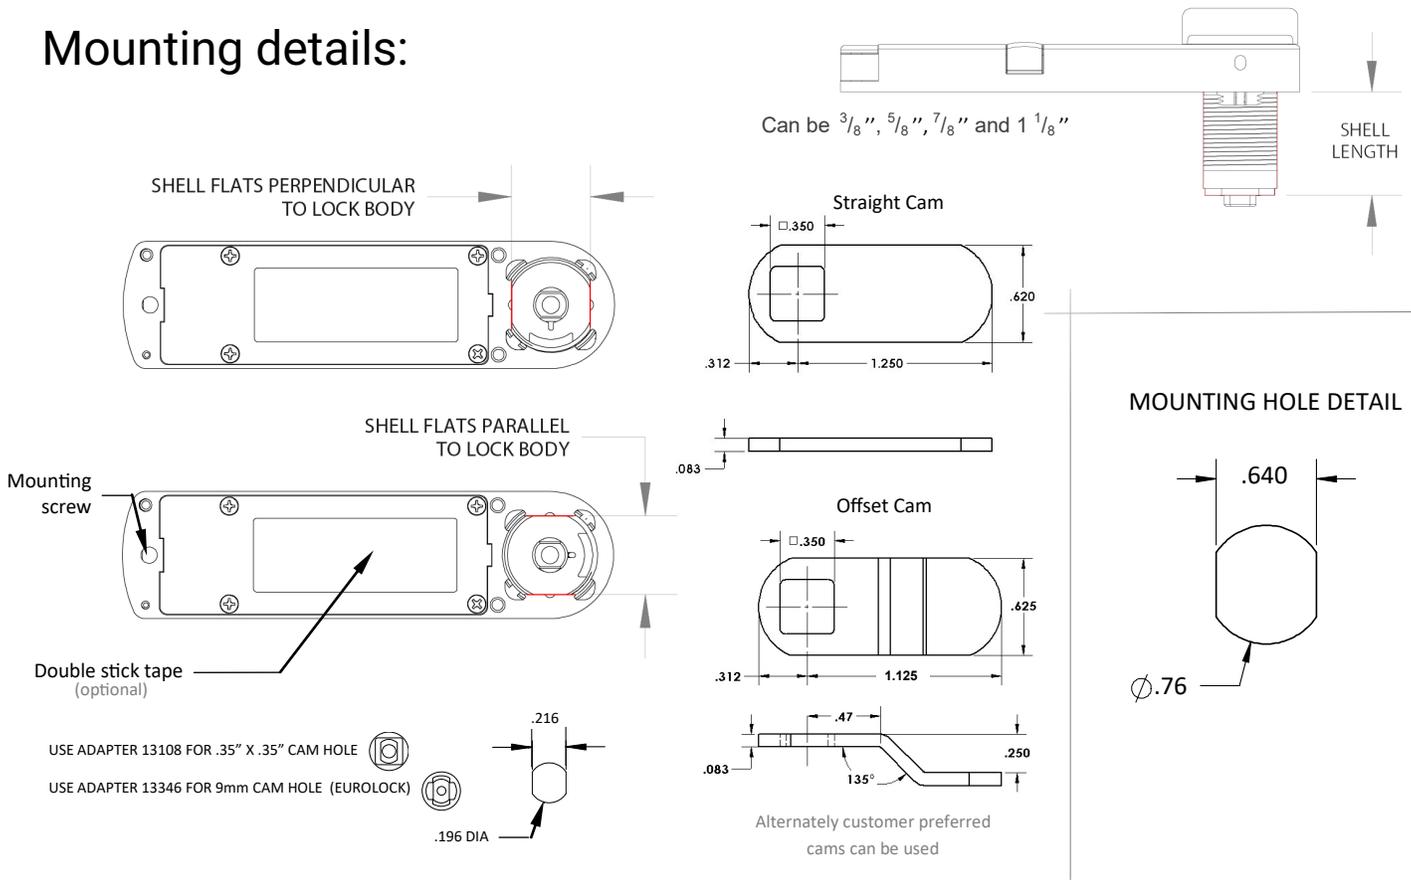

Orientation options:

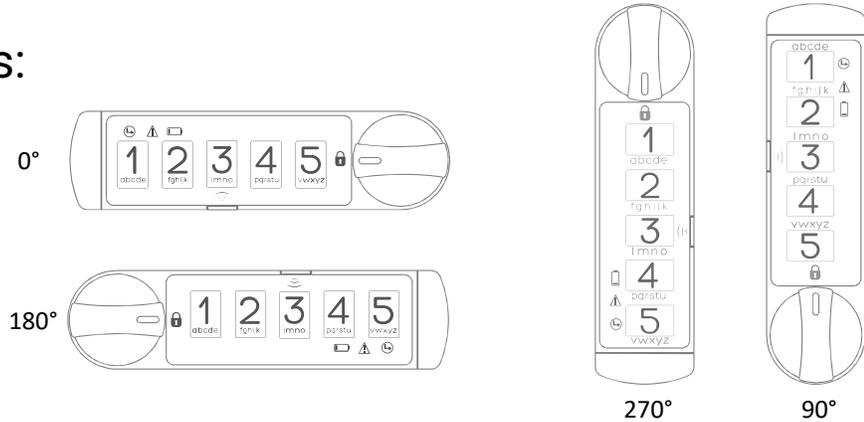

Key-fobs:

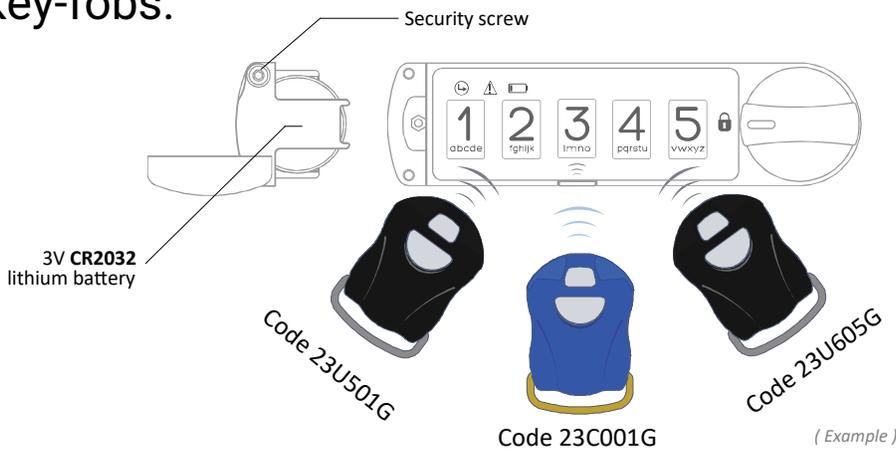

The **MicroIQ** can pair one control key fob and two user key fobs simultaneously.

Multiple key fobs of the same code can be used to access the lock.